TR-30BEV-R/L-SG-A

TR-30BEV-R-SG-A (Right hinged)

TR-30BEV-L-SG-A (Left hinged)

FEATURES

- Balanced, forced-air refrigeration system enables proper airflow and even temperature throughout to keep food fresh.

- Industry exclusive, 300-series stainless steel interior and exterior.

- All stainless steel, beautifully crafted proud hinges pass True's rigorous one million door opening test.

- Beautifully crafted solid stainless steel door with 120° stay-open feature and ergonomically designed, robust, tubular handle.

- Commercially inspired lift-up grill on top of the unit with toe kick that complements the look of True's undercounter units.

- Ramp-up, showcase interior LED lighting provides amazing illumination throughout.

- Low-E, double pane, UV tinted glass.

- Intuitive True Precision® Control and readout provides digital accuracy and easy operation.

- Shelving to accommodate a variety of bottle shapes and sizes.

ORGANIZATION

- 3 adjustable/removable electropolished stainless steel wire shelves.

- 1 fixed electropolished stainless steel wire shelf.

- 2 full-extension, soft-close wine racks.

- 1 pull-out stainless steel wire wine bin.

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at **true-residential.com/custom**.
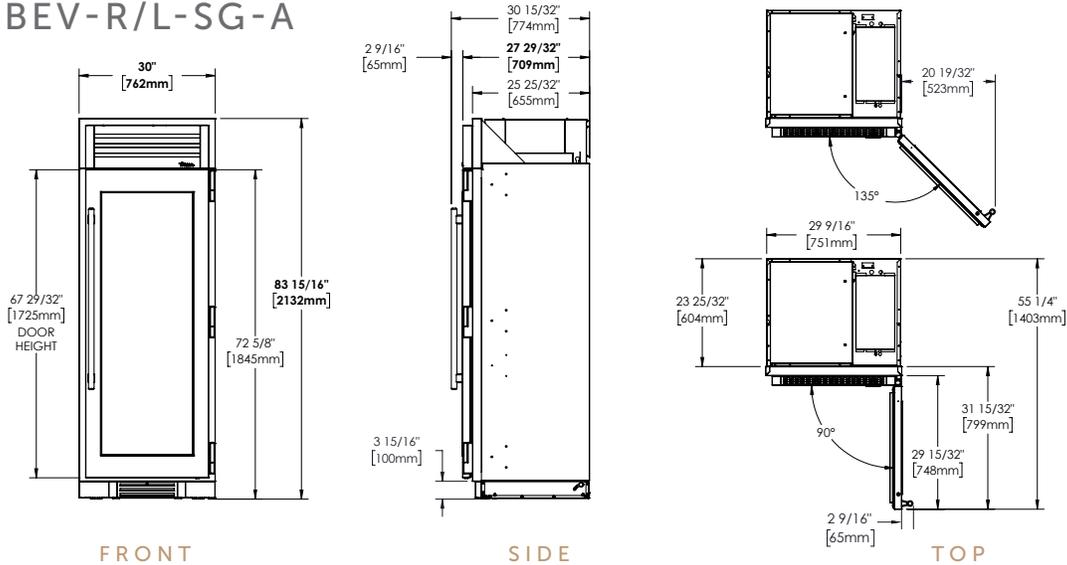

TR-30BEV-R-SG-A

SPECIFICATIONS

Dimensions (w x h x d)	30" x 84" x 24"
Cutout Dimensions (w x h x d)	
Flush Opening	30¼" x 84¼" x 26"
Standard Opening	29¾" x 84" x 24"
Capacity (cu. ft.)	20.3
Temperature Range	33°F – 42°F
Weight (lbs.)	545
Voltage	115/60/1 115/60/1 NEMA-5-15R
Amps	2
Annual Energy Consumption (kwh)	307
Power Cord Length (ft.)	9
Energy Star Rated	—

2001 East Terra Lane | O'Fallon, MO 63366-4434 | p 636.240.2400 | f 636.272.7546 | true-residential.com | info@true-residential.com

BP_167941_11.21   Specifications subject to change without notice.

TR-30BEV-R/L-SG-A

FRONT

30" [762mm]
83 15/16" [2132mm]
67 29/32" [1725mm] DOOR HEIGHT
72 5/8" [1845mm]

SIDE

30 15/32" [774mm]
2 9/16" [65mm]
27 29/32" [709mm]
25 25/32" [655mm]
3 15/16" [100mm]

TOP

20 19/32" [523mm]
135°
29 9/16" [751mm]
23 25/32" [604mm]
55 1/4" [1403mm]
31 15/32" [799mm]
29 15/32" [748mm]
90°
2 9/16" [65mm]

OPENING DIMENSIONS

FLUSH OPENING

WIDTH	HEIGHT	DEPTH
30¼"	84¼"	26"

STANDARD OPENING

WIDTH	HEIGHT	DEPTH
29¾"	84"	24"

TOP

25 25/32" [655mm] FLUSH INSTALL
23 25/32" [604mm] STANDARD INSTALL

FRONT

ELECTRICAL LOCATED IN THIS AREA
8" [203mm]
2" [51mm]
84 1/4" [2140mm] FLUSH INSTALL
84" [2134mm] STANDARD INSTALL
77" [1956mm]
29 3/4" [756mm] STANDARD INSTALL
30 1/4" [768mm] FLUSH INSTALL
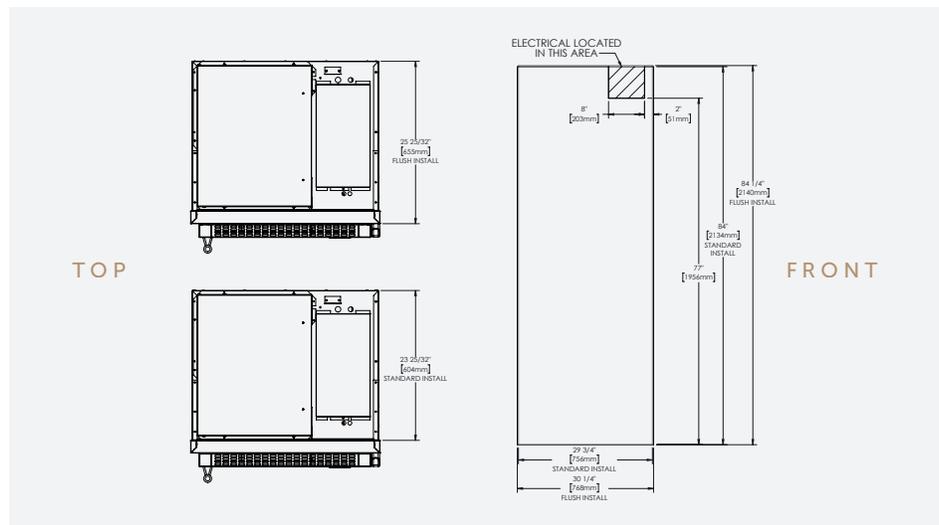
MODEL OPTIONS

MODEL	FINISH
TR-30BEV-R-SG-A	Stainless glass door right-hinged
TR-30BEV-L-SG-A	Stainless glass door left-hinged

ACCESSORIES (OPTIONAL)

Joining kit

Side panel(s)

Electropolished stainless steel wire shelf

Full size anti-condensation pad

WARRANTY

3 year full (parts & labor)

6 year sealed system (parts & labor)

7–12 year (parts only – sealed system on registered products)

Specifications subject to change without notice.